

AAGMAN
international
obtaining the unobtainable



**YOUR PREFERRED PARTNER
IN HARDWARE**

Fit | **Hold** | **Keep** | **Where**
Perfectly | **Tightly** | **Securely** | **Ever** Required

M. +91 96384 20205 | e. aagmaninternational@gmail.com | www.aagmaninternational.com

IMPORT | EXPORT | DISTRIBUTION



ABOUT US

- Aagman international Started its journey in the year 2016. Right from the beginning within one year company started the production in its 100% of the capacity of manufacturing various Bathroom Fittings, Sanitary Fitting and also furniture Hardware.
- In order to maintain the quality, specification and overall workmanship, the company imported best machinery and various types of die sets from best places. The company also imported lots of gauges, micrometers, calipers, scales, meters and all other testing equipments for the calibration of the items in general and auxiliary and O.E. parts in particular. our company located in Gujarat, India.
- Our all products made by heavy duty material and number one quality, full of strength and super amazing quality provides you with best packaging materials.
- Our quality is unbeatable and 100% genuine products manufacturing by us.
- Our company motto is also very simple **"quality is not an act, it is a habit"**



CLAMP FITTINGS


G. I. NUT CLAMP WITH RUBBER EPDM RUBBER

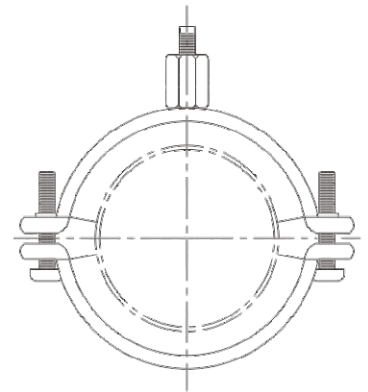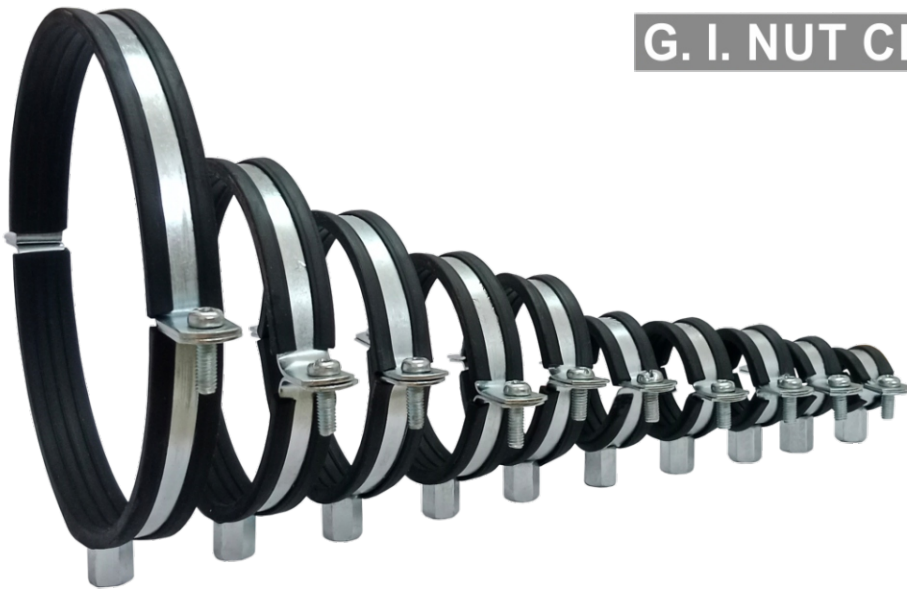

SIZE	½"	¾"	1"	1 ¼"	1 ½"	2"	2 ½"	3"	4"	6"
THICKNESS	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM
BOX PACKING	550	450	400	350	275	250	200	180	150	100

Split Pipe support clamp is an engineering marvel. It has been designed to give vertical and horizontal support to pipes and cables.

This support does not merely mean holding pipes and cables in place but much more than that. The **Aagman** split pipe support clamps give tight and right support with the freedom to easily repair, maintain and change in future which ordinary clamps fail to do. The **Aagman** clamps are Designed in such a way that they can easily be said the next generation clamps.



Strengthened welded nut
M8/M10- ½" to 2"
M10-2½", 3", 4", 5", 6", 8"

EPDM Rubber Lining For Vibration And Sound Insulation



Electro Zinc Plated Steel Clamp Body

Lock bolts allow adjustment to accommodate varying pipe diameters



Rubber Pad inner grooves for tight support

M6 Lock Bolts for Size ½" to 3" M8 lock bolts for sizes 4" to 8"



Make a hole of size 8mm/10mm the wall for the fastener where the pipe is be mounted or hanged.

Insert hammer drive anchor the fastener in the hole. Place pin inside the fastener and strike with hammer to make fastener fixed firmly in the wall. If using 3 leaf bolt shield for distance, place fastener into the hole and tighten with rod. When fully tightened put a nut washer at wall level to keep fastener in place.



Separate the split clamp part by unscrewing the inside lock bolts. Screw the connecting nut parts to the threaded part of the fastener or in the case of the 3 leaf bolt shield to the rod attached to it.


Place the pipe over the clamp half fixed firmly to the wall with the fastener. Put the outer half of the clamp over the pipe and screw the side locking bolts. Tighten the bolts as per requirement according to the slight variation in the pipe diameter.



Follow the same procedure for horizontal and roof hanging.

CLAMP FITTINGS

G. I. NAIL CLAMP H. DUTY

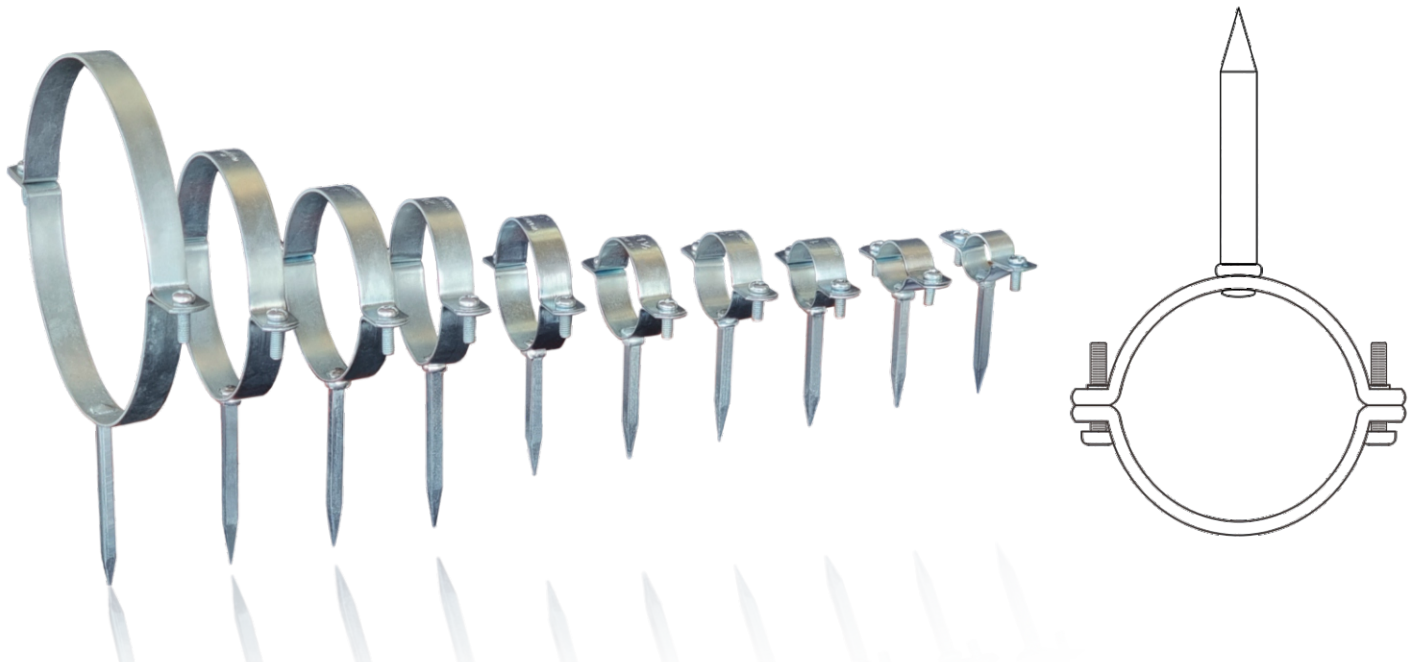

SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
THICKNESS	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM
BOX PACKING	550	550	500	400	350	250	175	150	100	80

Split Pipe support clamp is an engineering marvel. It has been designed to give vertical and horizontal support to pipes and cables.

This support does not merely mean holding pipes and cables in place but much more than that. The **Aagman** split pipe support clamps give tight and right support with the freedom to easily repair, maintain and change in future which ordinary clamps fail to do. The **Aagman** clamps are Designed in such a way that they can easily be said the next generation clamps.



Make a hole of size 5mm the wall for the fastener where the pipe is be mounted or hanged.

Insert hammer drive anchor the fastener in the hole. Place pin inside the fastener and strike with hammer to make fastener fixed firmly in the wall. If using 3 leaf bolt shield for distance, place fastener into the hole and tighten with rod. When fully tightened put a nut washer at wall level to keep fastener in place.





Separate the split clamp part by unscrewing the inside lock bolts. Screw the connecting nut parts to the threaded part of the fastener or in the case of the 3 leaf bolt shield to the rod attached to it.

Place the pipe over the clamp half fixed firmly to the wall with the fastener. Put the outer half of the clamp over the pipe and screw the side locking bolts. Tighten the bolts as per requirement according to the slight variation in the pipe diameter.



Follow the same procedure for horizontal and roof hanging.

G. I. U CLAMP H. DUTY

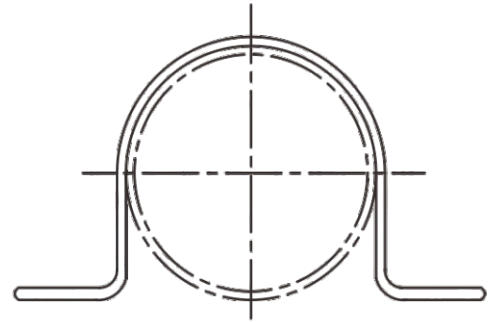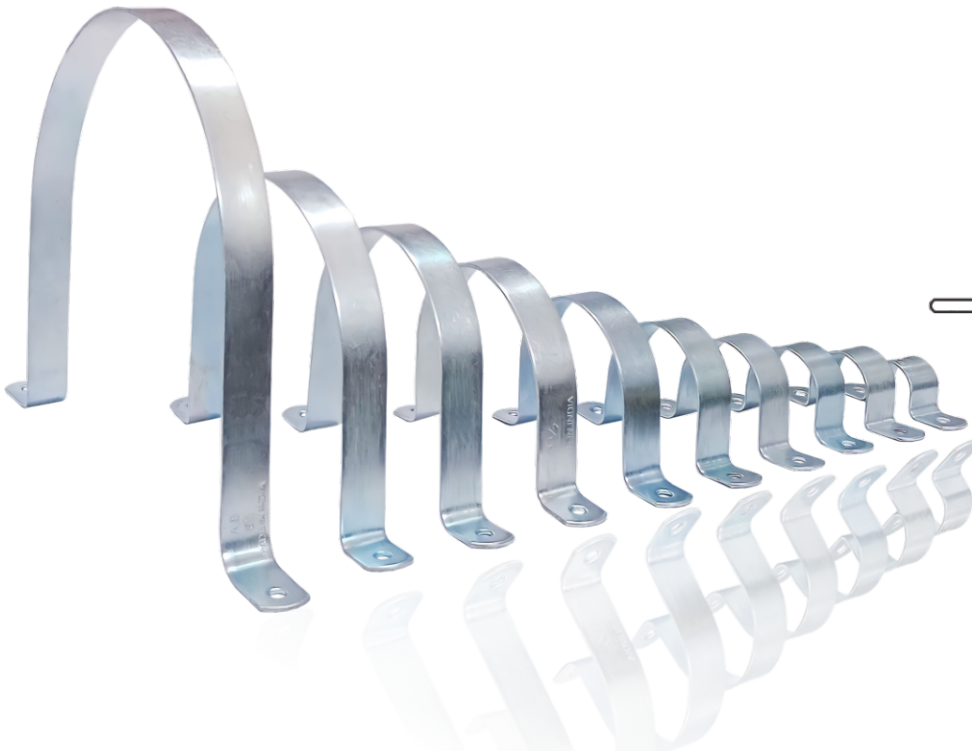

SIZE	½"	¾"	1"	1 ¼"	1 ½"	2"	2 ½"	3"	4"	6"
THICKNESS	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.2 MM	1.5 MM	1.5 MM	1.5 MM	1.5 MM
BOX PACKING	1400	1200	1000	700	1000	1000	500	500	400	300

GI U Clamps are metal clamps made from galvanized iron, designed to hold and secure pipes or tubes in place. They are used in various industries like plumbing, construction, and automotive.

Split Pipe support clamp is an engineering marvel. It has been designed to give vertical and horizontal support to pipes and cables.

This support does not merely mean holding pipes and cables in place but much more than that. The **Aagman** split pipe support clamps give tight and right support with the freedom to easily repair, maintain and change in future which ordinary clamps fail to do. The **Aagman** clamps are Designed in such a way that they can easily be said the next generation clamps.

BATH FITTINGS



C.P. BRASS EXTENSION NIPPLE



BRASS EXTENSION NIPPLE

SIZE	ITEM WEIGHT	BOX PACKING
1/2" x 5 MM	25 GM	300
1/2" x 10 MM	28 GM	250
1/2" x 15 MM	36 GM	250
1/2" x 20 MM	46 GM	200
1/2" x 25 MM	56 GM	200
1/2" x 30 MM	66 GM	200
1/2" x 40 MM	76 GM	150
1/2" x 50 MM	88 GM	150
1/2" x 60 MM	120 GM	100
1/2" x 3/4 x 15 MM	45 GM	250
1/2" x 3/8" x 15 MM	36 GM	250



BRASS REDUCING BUSH

SIZE	ITEM WEIGHT	BOX PACKING
½" x ¼"	30 GM	300
½" x 3/8"	25 GM	300
¾" x ½"	36 GM	250
¾" x ½"	40 GM	250
1" x ½"	70 GM	200
1" x ¾"	54 GM	200
1" x 1 ¼"	115 GM	100
1" x 1 ½"	190 GM	100
1 ½" x ¾"	250 GM	100
1 ½" x ½"	290 GM	100
1 ½" x 1 ¼"	130 GM	100
2" x ¾"	390 GM	50
2" x 1"	350 GM	50
2" x 1 ½"	240 GM	50
2" x 1 ¼"	250 GM	50

- **Material & Finish** : Reducer bushing is manufactured with heavy duty Brass; Chrome Plated that gives a glossy finish and makes it.
- **Functioning** : Tested for extreme temperatures; Prevents lime-scale deposition.
- **Highlights** : Anti-Corrosive and Rust-Proof material ensures long lasting durability; Eco-friendly and reusable packaging; Available in multiple size
- **100% Made in India.**



BRASS HAX NIPPLE



C.P. BRASS HAX NIPPLE

SIZE	1/4"	3/8	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
WEIGHT	12 GM	18 GM	36 GM	50 GM	70 GM	100 GM	225 GM	315 GM	360 GM	650 GM	1400 GM
BOX PACKING	500	500	250	200	100	100	80	20	10	10	5

Benefits of Brass Hex Nipple

Here are some of the advantages of using brass hex nipples :

- **Strength:** Brass is a strong material that can withstand a lot of pressure. This makes it ideal for use in plumbing applications, where pipes are often under pressure from water.
- **Durability:** Brass is a durable material that can withstand a lot of wear and tear. This makes it a good choice for long-lasting plumbing fixtures.
- **Corrosion resistance:** Brass is a corrosion-resistant material that can withstand exposure to water, chemicals, and other harsh elements. This makes it a good choice for use in plumbing applications where pipes are exposed to these elements.
- **Conductivity:** Brass is a good conductor of heat. This makes it a good choice for use in plumbing applications where pipes are carrying hot water.

What are the Uses of a Hex Nipple

Here are some examples of where hex nipples are used in kitchen and bathroom fittings :

- To connect a faucet to a water supply line
- To connect a shower head to a pipe
- To connect a toilet to a sewer line
- To connect a sink to a drain line



BRASS TANK CONNECTOR

SIZE	½"	¾"	1"	1 ¼"	1 ½"	2"	2 ½"	3"	4"
WEIGHT	72 GM	97 GM	110 GM	175 GM	188 GM	310 GM	700 GM	1300 GM	1900 GM
BOX PACKING	200	140	80	50	35	20	10	12	6

We offer Brass Connectors for water tanks and DZR water tank inserts and male connectors with back nuts, lock nuts. Rainwater tanks are installed to make use of rain water for later use, reduce mains water use for economic or environmental reasons, and aid self-sufficiency. Stored water may be used for watering gardens, agriculture, flushing toilets, in washing machines, washing cars, and also for drinking, especially when other water supplies are unavailable, expensive, or of poor quality, and that adequate care is taken that the water is not contaminated or the water is adequately filtered.

Brass Tank Connectors Brass Water Tank Fittings Description :

- Available Brass tank Connector Brass Water Tank Fitting Nickel plated Bronze Gun Metal Gun Metal Water Tank Connector Plastic PVC water tank connector fitting.
- Also available with back nut Rubber washer and Compression nut and olive where required. Our Brass Bronze Copper Foundry produce best casting which are machined.
- We offer Brass Fitting Brass Connector for PVC Water tank Roto Moulded Water Tank.

CLAMP FITTINGS



SPRINKLER CLAMP

SIZE	THICKNESS
½"	1.5 MM
¾"	1.5 MM
1"	1.5 MM
1 ¼"	1.5 MM
1 ½"	1.5 MM
2"	1.5 MM
2 ½"	1.5 MM
3"	1.5 MM
4"	1.5 MM
6"	1.5 MM

MIRROR CLAMP

ITEM NAME	SIZE	BOX PACKING
Mirror Clamp	Standard Size	400 PCS.





SIZE

8 MM X 2 MTR

10 MM X 2 MTR

THREADED BAR

Threaded rod, also known as threaded bar, threaded studding or screw rod, is a common fastener type. It is used much the same way as a very long, thick bolt or screw. Screwed rod threading might run the full length of the stud (all-thread), or partway along from both ends.

ANCHOR BOLT (BULLET TYPE)

Bullet Fasteners of a zinc plated steel tubular expansion shield and a solid, cone-shaped expander plug. The expander plug is case hardened and tempered to prevent galling and binding during expansion. The shield has four equally spaced slots for a portion of its length and the bottom part may be knurled.

SIZE

8 MM

10 MM




COUPLING NUT



SIZE

8 MM X 4"

10 MM X 4"

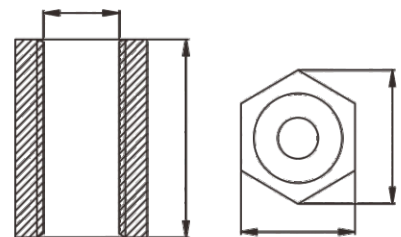

Coupling nuts, also called extension nuts, are used to join two threaded rods or pipes, including threaded rods or pipes of different sizes. Usually constructed in a hex shape for wrench hold, the most common uses for coupling nuts include tightening rod assemblies or to pushing a completed rod assembly outward.

BATH FITTINGS

BRASS TEE



SIZE	WEIGHT	BOX PACKING
½"	72 GM	150
¾"	150 GM	100
1"	240 GM	50

The brass tee MABT can be fitted along various diameters across different pressure outlets in the plumbing system. A tee is specifically useful in changing the direction of water flow with minimum to negligible structural changes in the overall piping system.

SIZE	WEIGHT	BOX PACKING
½"	62 GM	200
¾"	135 GM	150
1"	200 GM	70

The Brass Elbow – MABT is a variation of the typical elbow joint with a protruding brass threaded exterior. This part is screwed into a female ended part of fitting or equipment to divert the flow of water in a certain direction at a 90-degree angle in the plumbing system.

BRASS ELBOW



BRASS SOCKET



SIZE	WEIGHT	BOX PACKING
¼"	25 GM	500
3/8"	25 GM	500
½"	40 GM	250
¾"	65 GM	200
1"	75 GM	100

The brass socket female-female is a pipe fitting made of brass used to join two straight pieces of pipe of the same diameter. It consists of a hollow cylindrical body with internal or female thread at both ends.

S.S. HINGES



SIZE	THICKNESS
3 x 2" x 1.50 MM	60 GM
3 x 2" x 2.00 MM	69 GM
3 x 2" x 2.50 MM	93 GM
4 x 2.5" x 2.50 MM	150 GM
4 x 2.5" x 2.00 MM	114 GM
4 x 3" x 3.00 MM	225 GM
5 x 2.5" x 2.50 MM	210 GM
5 x 2.5" x 2.00 MM	153 GM
5 x 3" x 2.50 MM	228 GM
5 x 3" x 3.00 MM	285 GM
6 x 2.5" x 2.50 MM	245 GM
6 x 3" x 3.00 MM	336 GM

SHOWER



CURV SHOWER

MATERIAL - SS 304

SIZE

4" x 4"

6" x 6"

8" x 6"

12" x 12"

SPECIFICATION :

1. Single function rain
2. Zero maintenance
3. Mirror finish on SS 304
4. Chrome
5. All PVD finishes available

QUALITY DETAILS :

1. 1mm thickness SS 304
2. Silicon rubber nozzle
3. Pressure 1.0 bar - 3.0 bar

SHOWER



SLIM SHOWER

MATERIAL - SS 202

SIZE

4" x 4"

6" x 6"

8" x 6"

12" x 12"

SPECIFICATION :

1. Single function rain
2. Zero maintenance
3. Mirror finish on SS 202
4. Chrome
5. All PVD finishes available

QUALITY DETAILS :

1. 0.55mm thickness SS 202
2. Silicon rubber nozzle
3. Pressure 1.0 bar - 3.0 bar

TABLE BRACKET



SIZE

300 MM

400 MM

500 MM

600 MM

SPECIFICATION :

1. Can hold weight up to 50kg.
2. These bracket can hold a table of double its size.
3. Price given is for 1set=2pcs

foldable, sturdy & stable, space-saving, rustproof, easy to install, Material : Powder-coated steel colour : Black Tone Packed included : 2 Pcs. (1 Pair) Folding brackets, 6psc shor Screws for fixing wooden top 4pcs long Screws for wall 4pcs plastic expansion anchors.

HARDWARE FITTINGS



KIM NIPPLE

SIZE

1/2"

3/4"

1"

1 1/4"

1 1/2"

2"

2 1/2"


3"

4"

VALV



CLAMP FITTINGS

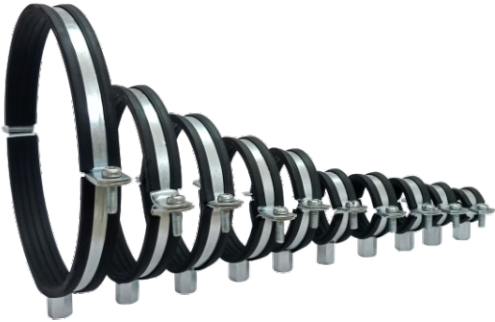

G. I. NUT CLAMP WITH RUBBER




MIRROR CLAMP



G. I. NAIL CLAMP H. DUTY



THREADED BAR

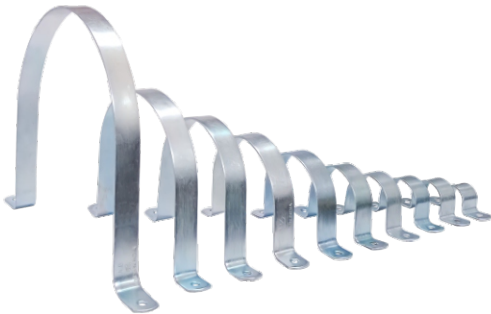

G. I. U CLAMP H. DUTY



**ANCHOR BOLT
(BULLET TYPE)**



SPRINKLER CLAMP



COUPLING NUT

BRASS FITTINGS



BRASS EXTENSION NIPPLE



BRASS HAX NIPPLE



BRASS REDUCING BUSH



BRASS REDUCING NIPPLE



BRASS TANK CONNECTOR



C.P. BRASS ELBOW



C.P. BRASS TEE



BRASS SOCKET

HARDWARE FITTINGS



KIM NIPPLE



S.S. HINGES



CURVE SHOWER



FLAT SHOWER



VALVE



TABLE BRACKET